


MI952 **NEW**



Features

- Support AMD Athlon™ 64 X2 / Athlon™ 64/ Sempron™, up to 2.2GHz processors
- 2x DDR2 DIMM, Max. 4GB
- 2x PCI-E Gigabit LAN
- Supports dual display
- Watchdog timer, HD Audio
- 2x SATA II, 8x USB 2.0, 4 x COM
- 1x PCI-E(x16) [(x8) Link]

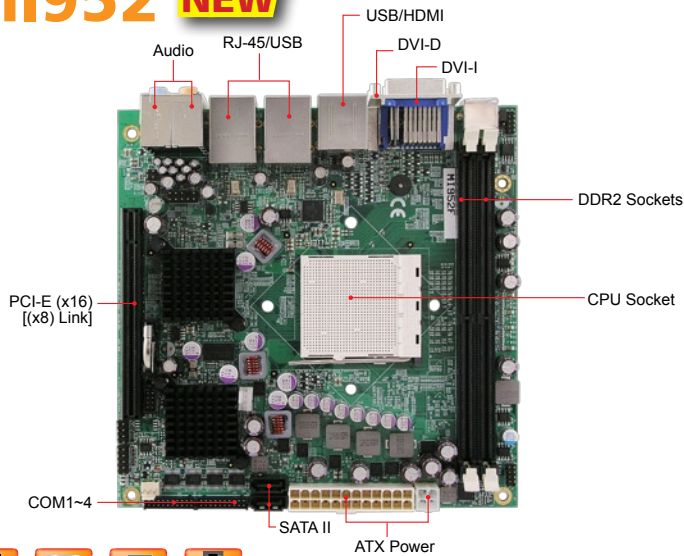

System

CPU	AMD Socket AM2 CPU Dual Core Athlon™ 64 X2, Single Core Athlon™ 64, Single Core Sempron™ processor, up to 2.2GHz
System Memory	2x DDR2 DIMM, Max. 4GB
System Chipset	AMD 780E + SB710
BIOS	Phoenix
Watchdog Timer	256 levels
SSD	N/A
H/W Monitor	Yes
Expansion Slot	1 x PCI-E (x16) [(x8) Link]

Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	TBC
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Graphics

VGA Controller	AMD 780E built-in Radeon HD3200 IGP w/ 128MB side port frame buffer (DDR3-800;32x16)
VGA Memory	Shared memory
Display Interface	Onboard DVI-I & DVI-D, HDMI

Ordering Information

MI952F	Socket AM2, AMD 780E Mini-ITX motherboard with dual DVI+HDMI and dual Gigabit LAN, DDR3 128MB graphic memory onboard, 2x SATA II, 1x PCI-E(x16) [(x8) Link]
MI952	Socket AM2, AMD 780E Mini-ITX motherboard with dual DVI+HDMI and dual Gigabit LAN, 2x SATA II, 1x PCI-E(x16) [(x8) Link]

Ethernet

Controller	2x Realtek 8111C Gigabit LAN
Connector	RJ-45 on board

Multi I/O

Chipset	Fintek F81865 4x RS232, 2x SATA II, 1x KB, 1x Mouse
USB	6 ports on board Pin header for 2 ports (USB 2.0)
Audio	Built-in HD audio + AC97 codec (ALC888) for 7.1 CH
Others	Digital I/O (4-in/4-out)

Remarks:
* Specifications are subject to change without prior notice.